


E-core wood®
—— 沂可木

環保木材 第一選擇~

戶外地板
飾板天花
遮陽格柵
卡扣天花

 E-Core Wood & AluCo-Wood
is an environmental friendly material
which uses high-tech production technology,
enhances with stability of products and emphasizes on continuous
Environmental Protection.

 WOOD EASY
zero waste



 E-core wood.

10 YEAR
LIMITED WARRANTY

1. 本手冊所提供之設計參考圖，僅供參考使用，有任何設計、工法需求，歡迎與本公司業務人員聯繫。

2. 沂可木為科技複合性材料，尺寸公差為 2%。

3. 沂可木系列產品因保留較高木分子，因此容許與實木相近之紋理色差。

4. 請慎防非沂可木產品中因重金屬、塑化劑超標，而對您的健康及環境造成傷害。

5. 沂可木免責條款說明：(1) 安裝與使用區域的溫度應低於 65 度。(2) 人為損壞現象，如刮痕、烘烤、塗污... 等。(3) 自然災害，如冰雹、暴風、雷擊... 等。(4) 因運輸過程、裝卸不當或現場儲放於高低不均處造成損害。(5) 因安裝工法不當造成損害。

1. The information and drawings provided in this manual are for reference only! If you have any queries on design, construction and installation, you are welcome to contact our company and business unit. 2. E-Core Wood is wood plastic composite and dimensional tolerance is 2%.

3. E-Core Wood consists of high wood powder with molecular polymerization, thus similar to natural wood with texture and colour differences.

4. Please beware of non E-Core Wood products which contain excessive heavy metals and Plasticizer contents, which are harmful to your health and the environment.

5. Disclaimer : (1) Used and installed in region where temperature should be less than 65 degrees Celsius (2) Damages caused by human negligence such as scratches, fire, stain etc
(3) Natural disasters such as ice hail, storm, thunder & lightning etc. (4) Damages caused by improper handling during transportation and onsite storage on uneven ground
(5) Damages caused by improper installation or failure to follow the installation instructions supplied with the Products



01-02 沂可木 介紹

03-08 戶外地板 系列

09-14 飾板天花 系列

15-20 格柵飾條 系列

21-24 卡扣天花 系列

25-28 Q&A



杉澤官網



LINE@



FB

沂可木 E-Corewood。環保木材是利用高科技複合技術，將PVC塑膠分子與木分子的完美結合，不斷提升產品的穩定性，更堅持沂可木 E-Corewood。對環境的友善態度。

沂可木 E-Corewood。為環保木材，業界唯一獨創可回收再製的塑木產品，透過不斷的設計研發讓地球上的每一份資源不僅能極致運用還要能循環利用。

沂可木 E-Corewood。國際品牌在全球已得到廣泛讚賞與肯定，讓人們體驗系列產品所創造清新自然的生活空間！它能有效去除純天然木材自然缺陷，並具有防水、防焰、耐腐蝕、抗酸鹼、不龜裂、不變形的特點，無需維修、保養且便於清洗，可再生循環利用、彎曲強度極佳，表面已作特殊技術處理。尤其是在潮濕環境的應用，更是其他木製產品所不能相比。

沂可木 E-Corewood。對木材再循環利用，極大提高木材綜合利用率；它無污染、可重複再利用；生產過程無廢氣、廢水排放，無噪音；產品無毒性揮發，是室內外裝飾的最佳選擇。



E-Core Wood is an environmentally friendly wood material made from high-tech composite technology, a perfect combination of PVC plastic molecules and wood molecules, tremendously improve product stability and insists on the core value of E-Core Wood which is friendly approach towards the environment. E-Core Wood is an environmentally friendly wood, the implementer of recyclable plastic wood product in the industry, through our continuous design and development, we ensure that every resource on the earth can be used not only to its extreme but also to be recycled.

Our international brand of E-Core Wood has been widely recognized and affirmative globally, allowing to experience the fresh and natural living space through the creation of a series of our products! It can effectively remove the natural defects of natural wood and has the characteristics of waterproof, flame retardant, corrosion resistance, acid and alkali resistance, do not crack, do not deform, do not require repair, maintenance free and easy cleaning, able to recycle and reuse, excellent bending strength and the surface has been treated with special technology. Especially for applications in humid environments, it is incomparable to other wooden products.

The recyclable nature of E-Core Wood will greatly improves the comprehensive utilization rate of wood; it is pollution-free and can be reused; it do not emit exhaust or do not discharge waste water and cause noise pollution during the production process; the product is non-toxic and non-volatile, making it the best choice for indoor and outdoor decoration.

E-core wood

努力降低全球伐木量
堅持做環保

Strive to reduce global logging
Persist in environmental protection

循環再製-零廢棄

Recycle and reuse - zero waste

仿木再進階
獨特的木質美感及觸感

Unique resemble to the
appearance, aesthetics, colour
and texture of natural wood

多元的產品種類
專業的設計元素

Diversified product ranges;
Professional and specialty design

可上漆維護(有別於其它塑木)

Can do maintenance by painting (different
from other wood plastic composite)

可釘、可刨、可鋸
安裝簡易-降低施工成本

Can be nailed, planed, sawed...
Easy to install and reduce installation costs

優越的耐候性
不變質、不開裂、不脆化

Superior weatherability,
do not deteriorate, crack, brittle

防焰-具防燃特性

Fire and flame-retardant properties.

防水、防腐、防白蟻

Waterproof, corrosion and termite resistance

無鉛、無甲醛、無八大塑化劑

Lead free, formaldehyde free and free from
eight major plasticizers

SGS 塑木檢測數據
TESTING DATA

甲醛 Emission of formaldehyde (Mg/L) : 未檢出 N.D.

鉛含量 Lead test (mg/kg) : 未檢出 N.D.

八項塑化劑含量 8 types of Plasticizer(%) : 未檢出N.D.

耐酸性 Acid resistance test(5W/V%硫酸溶液) : 無異狀
Surface no influence

耐鹼性 Alkali resistance test(5W/V%碳酸鈉溶液) : 無異狀
Surface no influence

防焰測試 Flame retardant test : 防焰等級 Flame Retardant Rated

鹽霧測試 Salt spray test : 無異狀 Surface no influence

耐紫外線性試驗 Weather test UV : 外觀/無龜裂及粉化現象
No crack and chalking on exterior of product

以上檢測數據如有異動，恕不另行通知，請依最新資訊為準！
All update to the above test data will not be notified, the latest test data shall prevail!



戶外平台
陽台地板
浴室地板
木棧道
樓梯踏板
柵欄圍籬

戶外地板系列

沂可木 地板系列-獨有的自然木質紋理，有效的吸收紫外線、輻射熱，減少陽光反射。板面之間的縫隙完備了良好的排水及透氣功能，呈現給您最完美、最令您流連忘返休憩的一隅！

E-Core Wood 沂可木產品經 SGS 檢測，無毒、無鉛、無甲醛、無塑化劑，用的開心又安心；不變質、不開裂、不脆化、不粉化；防水、防焰、阻燃效果佳；安裝迅速方便，大大降低施工成本。

TH-9025 (雙面使用)

尺寸：90mm x 25mm
長度：366cm
常備色：CL26-淺胡桃
每坪使用量約10支/每箱8支



TH-14025D (單面使用)

尺寸：140mm x 25mm
長度：244cm
常備色：
● CL61-緬柚色
● CL63-風化灰
● CL66-淺胡桃
每坪使用量約10支

熱銷款



大自然系列

New Arrival

2021
新品上市

NA-14025

尺寸：140mm x 25mm
長度：244cm
常備色：
● CL61-緬柚色
● CL63-風化灰
● CL66-淺胡桃
每坪使用量約10支



地板邊蓋
XTI-14
60x15mm

L型收邊條
YFI-01
45x35mm


鋁木收邊條
I-5009
50x9mm
L-5009
50x59mm

塑木角材
WE5040
50x40mm
WE5027
50x27mm
TW3015
30x15mm

專用扣件
DBO07J

不鏽鋼螺釘
D1-0002B
(適用於實木角材
塑木角材)

自攻螺釘
D1-0004C
(適用於C型鋼
鋁製角材)

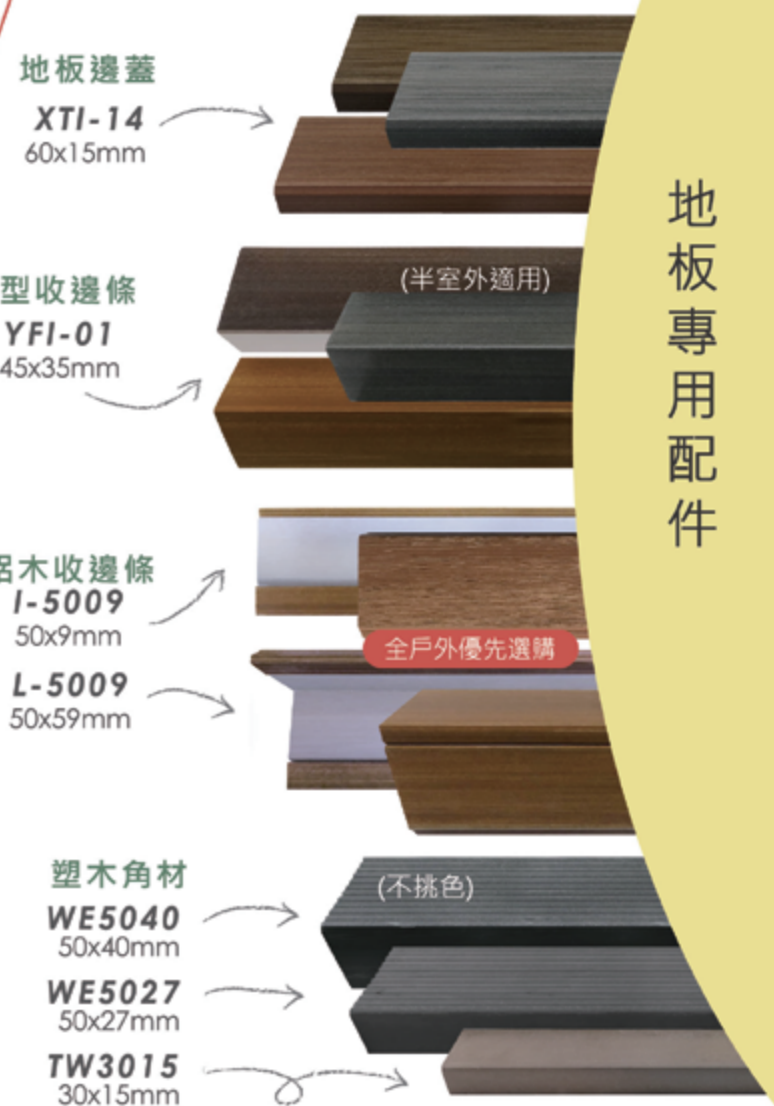

地板專用配件



E-Core wood decking Series
 Unique natural wood texture, effectively absorb ultraviolet light, radiant heat and reflect sunlight. Gaps between decking provide good drainage and ventilation functions. Present the most perfect, linger resting and relaxation area!
 E-Core Wood products tested with accordance to SGS testing
 Non-toxic, lead free, formaldehyde free, plasticizer free, use with joy and at ease. Excellent weather resistance, do not deteriorate, crack, brittle, chalk and is water resistance, flameproof with flame retardant properties, quick, easy installation and greatly reduce construction cost.

Outdoor platform
 Balcony Decking
 Bathroom Decking
 Wooden Walkway
 Staircase footboard
 Fence

Teak Colour
 緬柚色

風化灰
 Weathered Gray



淺胡桃色
 Light Walnut





More outdoor decking projects
 更多戶外地板案例



戶外地板安裝示意圖

圍籬安裝示意圖

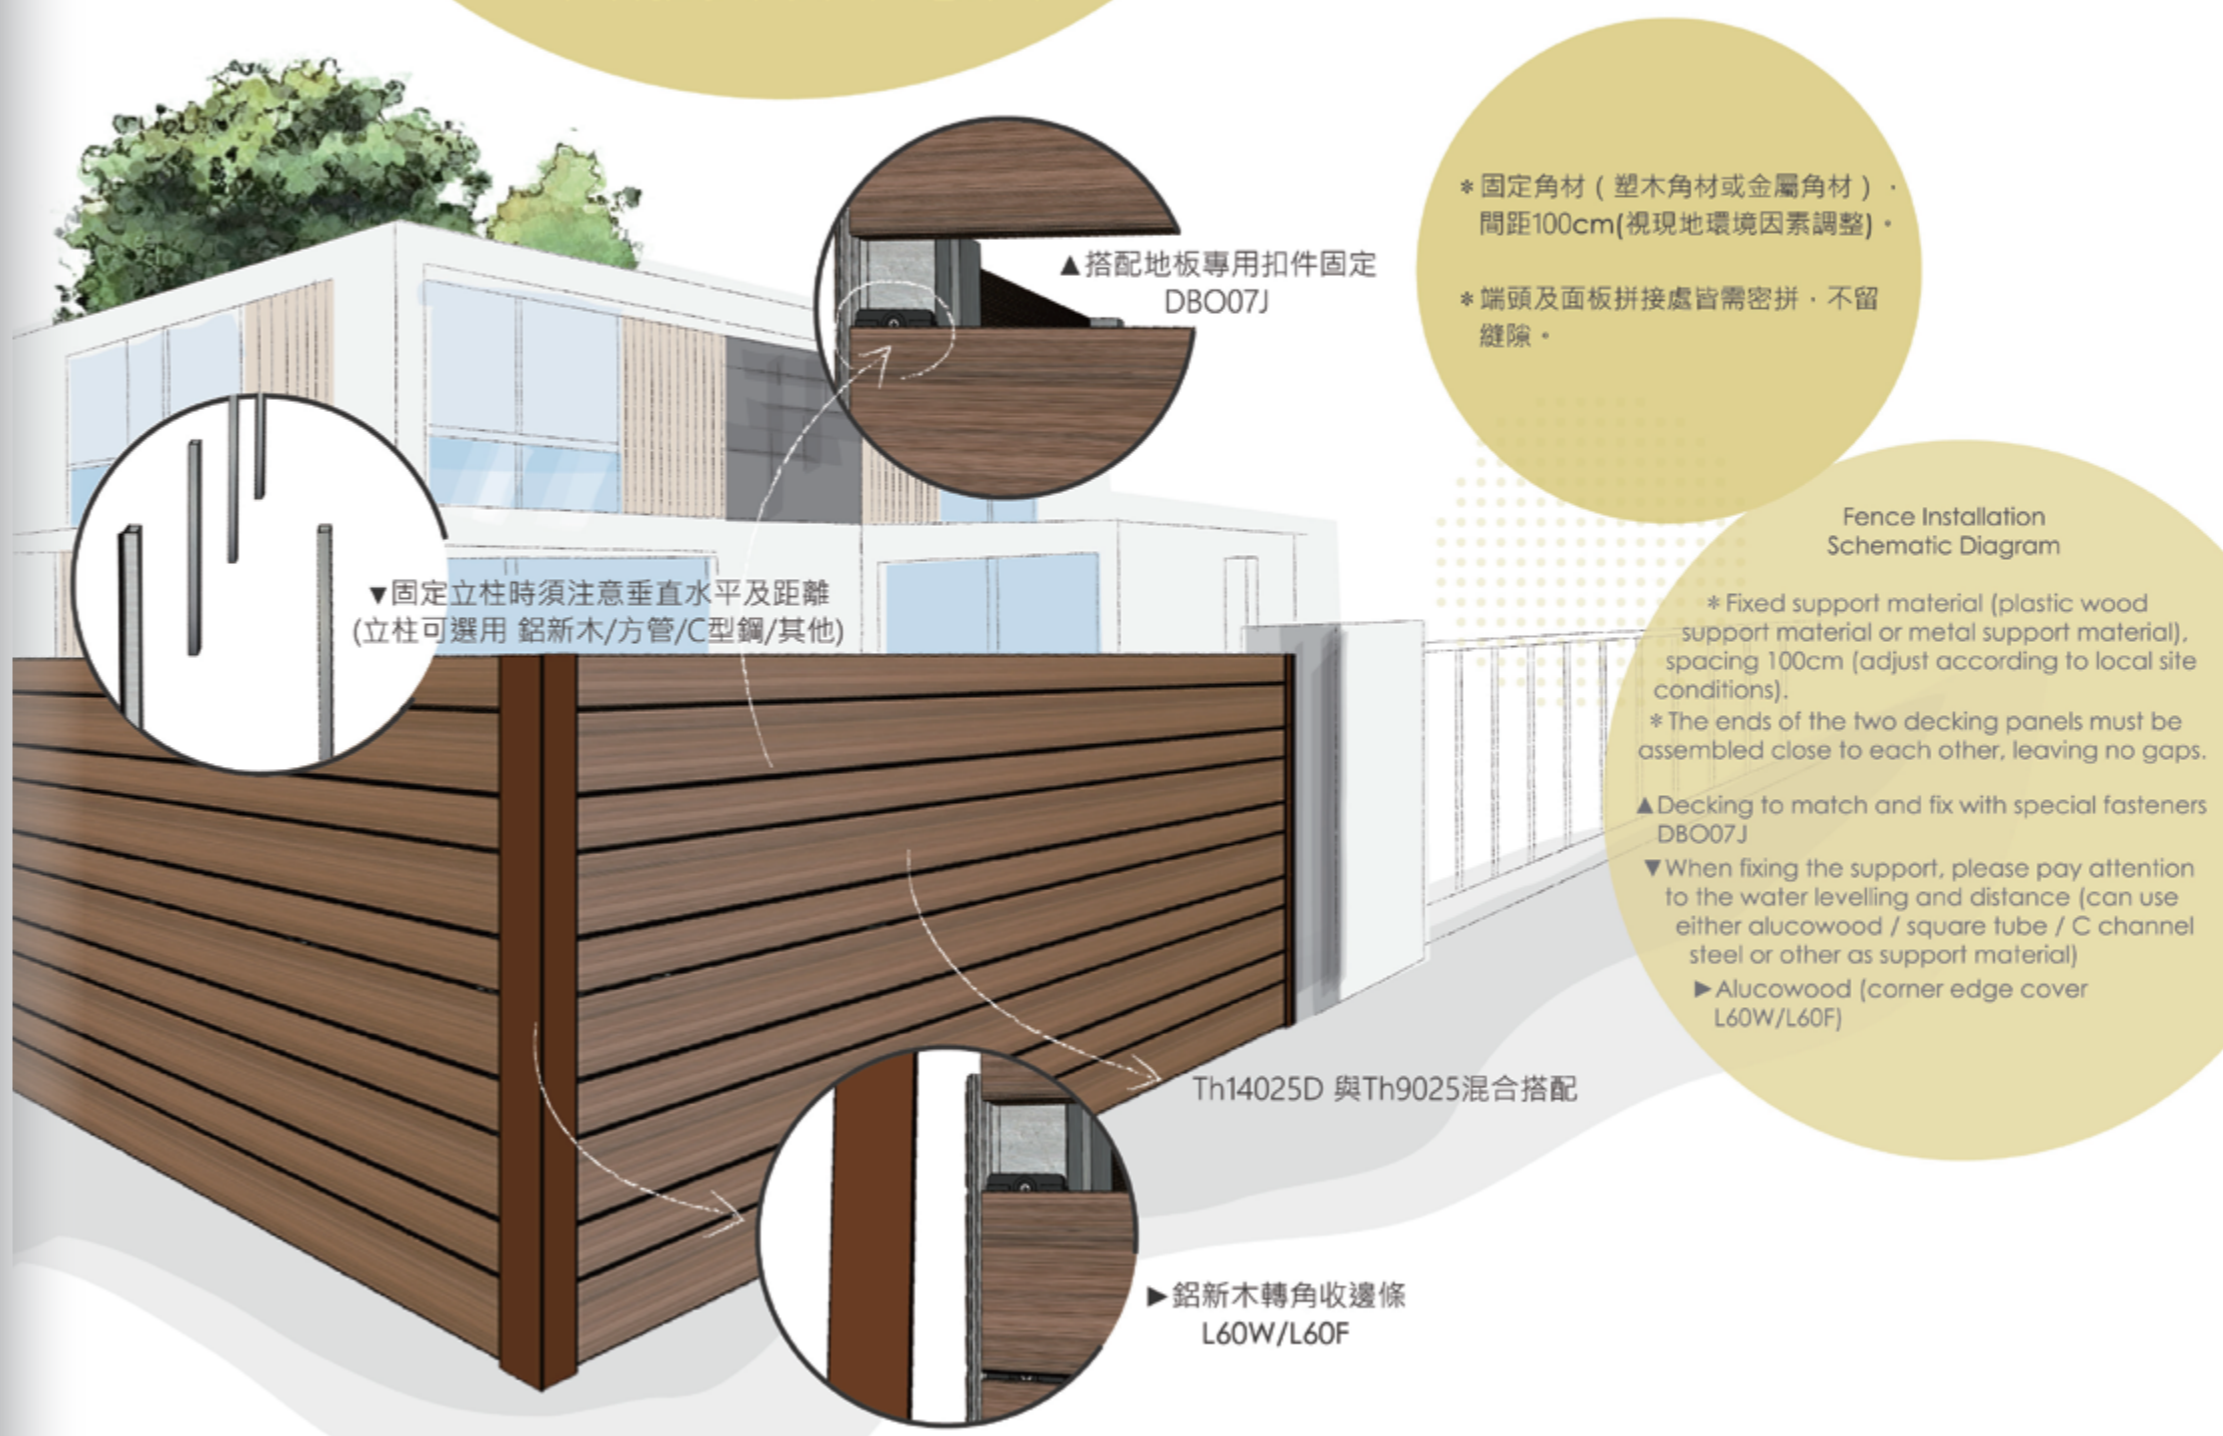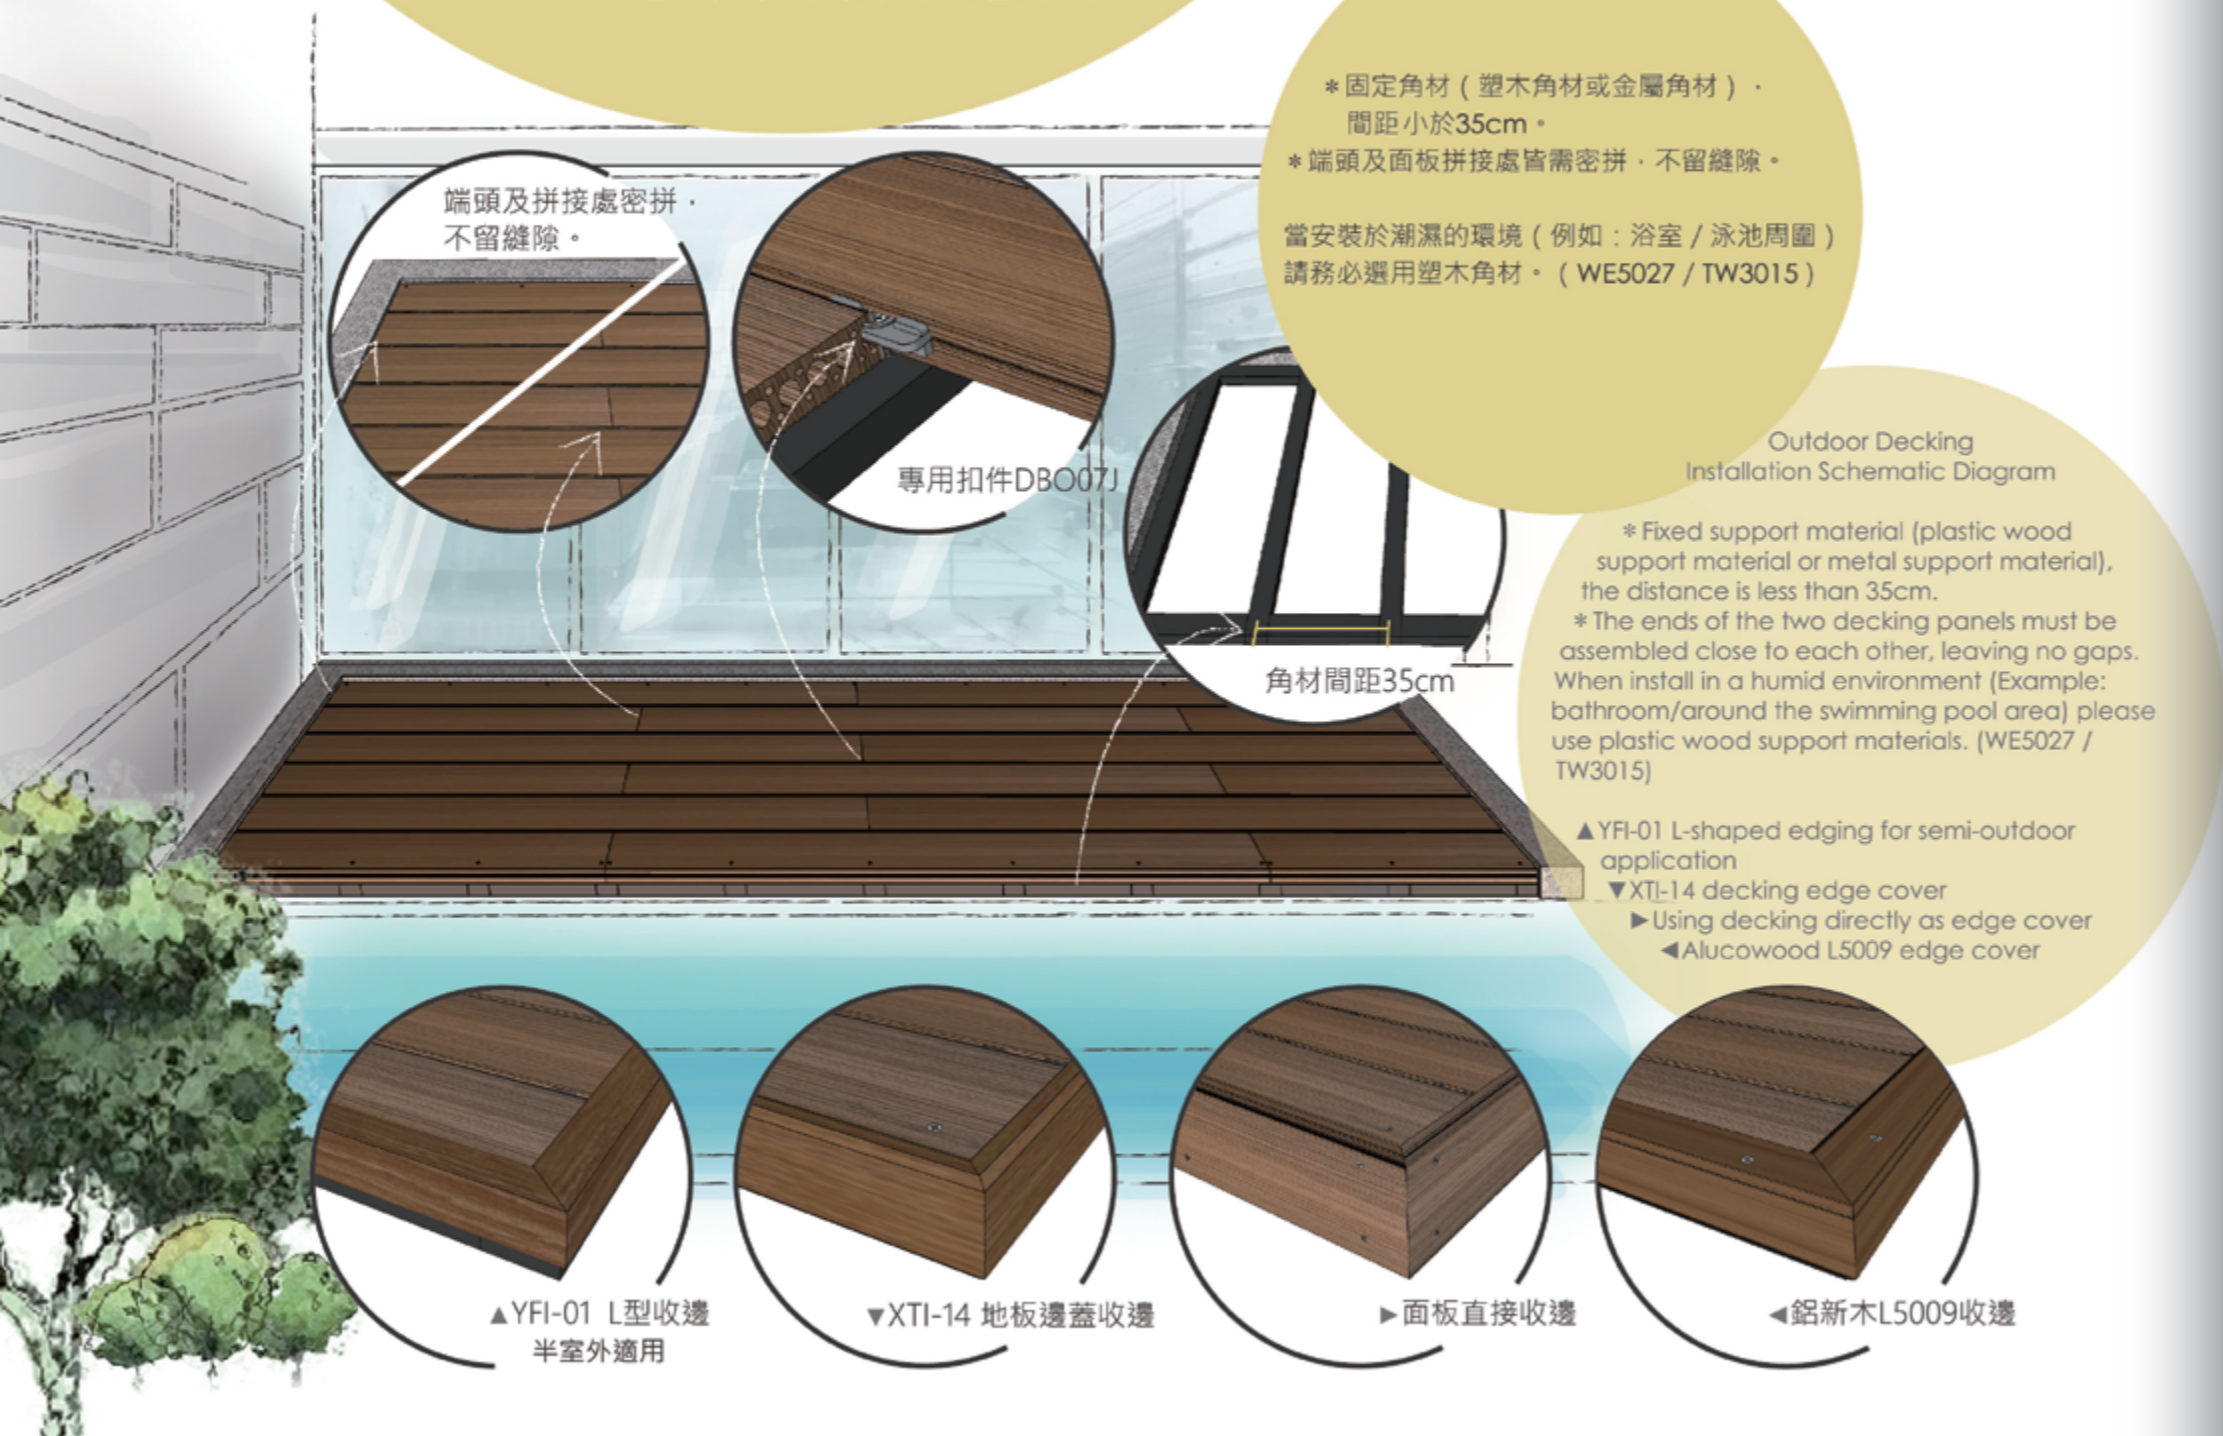




屋簷板
天花板
潮濕區
浴室
溫泉區
游泳池

飾板天花系列

設計·原創的靈魂~每一個設計都是文化的承接建築的美·在於每個千變萬化巧思的結合·每一個細節都被重視且妥善運用。

台灣地處亞熱帶地區·四面環海長年高溫多雨是典型的海島型氣候·中空多腔式結構·降低熱傳導率減少能源傳散隔熱·保溫達到節能效果·外加室內環境容易潮濕·所以在選擇裝潢材料時便更加的重要·不僅要美感更要具有優良的耐候性·E-Core Wood 沂可木產品具有優良耐候特性非常適合於台灣這種環境·室內游泳池·浴室·廁所·溫泉區或地下室等更是首選·做為室內運用建材·產品本身通過防焰測試及具阻燃效果是必需的。

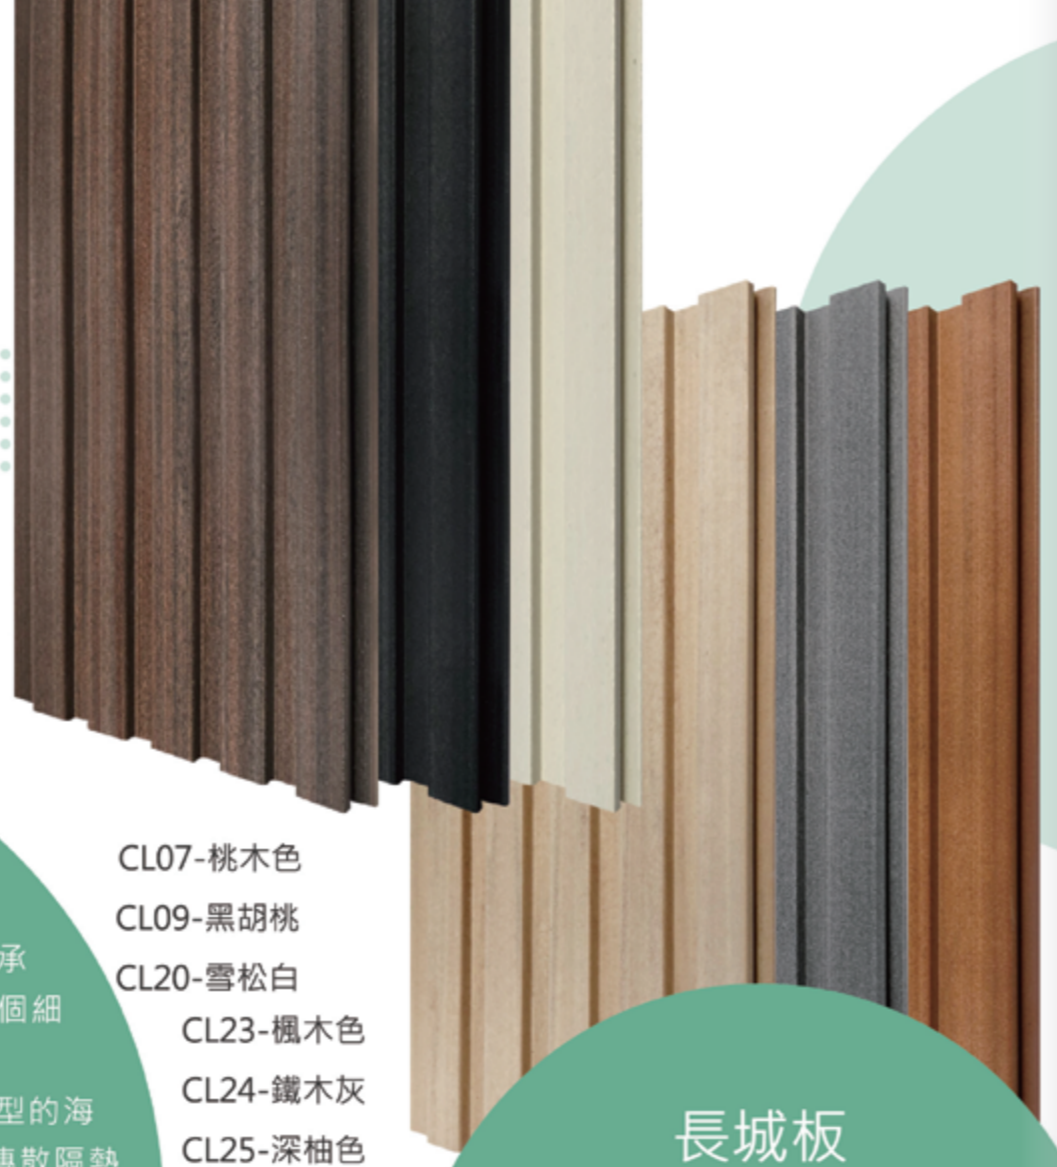

- CL07-桃木色
- CL09-黑胡桃
- CL20-雪松白
- CL23-楓木色
- CL24-鐵木灰
- CL25-深柚色

長城板 QBI-05


尺寸：15.9cm x 1cm
(有效寬度15.1cm)
長度：275cm/每箱12支
每坪使用量約8支



- CL09-黑胡桃
- CL24-鐵木灰
- CL25-深柚色

新寬長城板 QBI-14A

尺寸：20.7cm x 1.6cm
(有效寬度19.8cm)
長度：275cm/每箱12支
每坪使用量約6支

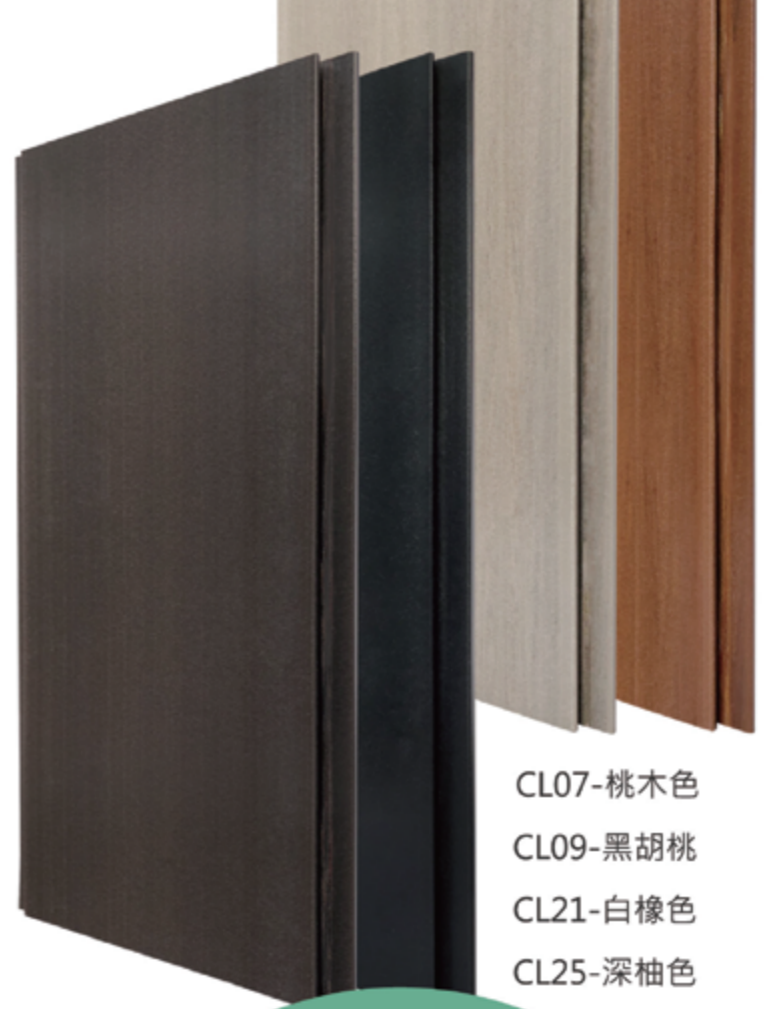

- CL07-桃木色
- CL09-黑胡桃
- CL21-白橡色
- CL25-深柚色

內牆平面板 QBI-15

尺寸：15cm x 0.9cm
(有效寬度13.35cm)
長度：275cm
每箱14支/每坪使用量約9支



- CL07-桃木色
- CL24-鐵木灰
- CL25-深柚色

新寬#80內外牆板 QBI-30

尺寸：10.25cm x 1.35cm
(有效寬度9.5cm)
長度：275cm
每箱24支/每坪使用量約13支



Swimming pool
Hot spring area
Bathroom
Humid area
Ceiling panel
Eaves panel

Decorative Ceiling Trimming Series

Design is the soul of originality~Every design is a cultural undertaking which is the beauty of architecture, it lies in the combination of every ever-changing ingenuity. Every detail must be taken seriously and properly use.

Taiwan is located in a subtropical area, surrounded by the sea and all year round having high temperature and with rain, which is a typical island climate,Hollow cavity profiles reduce the thermal conductivity which in turn greatly reduce the energy transmission losses, insulation and heat preservation enable energy saving.

In addition, the indoor environment is prone to humidity, so it is important when choosing a suitable decoration materials, not only it must be beautiful but also excellent in weather resistance, E-Core Wood products have excellent weather resistance and are very suitable for the environment in Taiwan. Indoor swimming pools, bathrooms, toilets, hot spring areas or basements are highly preferred areas.

As a building material for indoor application, it is necessary for the product to pass the flame test and having flame retardant rate.



More Decorative Ceiling Trimming projects

更多飾板天花案例



室內牆板安裝示圖

- * 固定角材 (一般角材或塑木角材) · 間距為30~50cm(視安裝位置調整) ·
- * 角材與面板之間可以加入三分夾板 · 角材間距可以調整為60cm ·

當安裝於潮濕的環境 (例如: 浴室 / 泳池周圍) 請務必選用塑木角材 · (WE5027 / TW3015)

Indoor Wall Panel Installation Schematic Diagram


- * Fixed support material (general support material or plastic wood support material), the distance is 30~50cm (adjust according to the site installation location).
- * Plywood can be added between the support material and the panel and the distance between the support material can be 60cm.

When install in a humid environment (Example: bathroom/around the swimming pool area) please use plastic wood support materials. (WE5027 / TW3015)


- ▲ Please pay attention to water levelling.
- ▼ Tongue and groove design, easy to install.
- ◀ Use YFI-01 for edge cover.



▲ 注意垂直水平

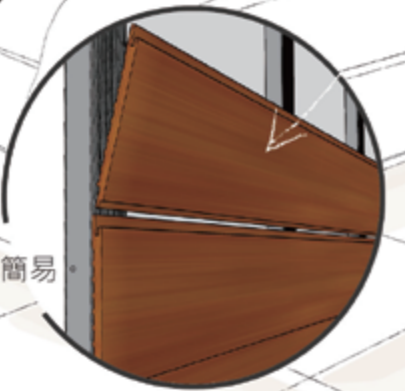

▼ 企口設計 · 安裝簡易 ·

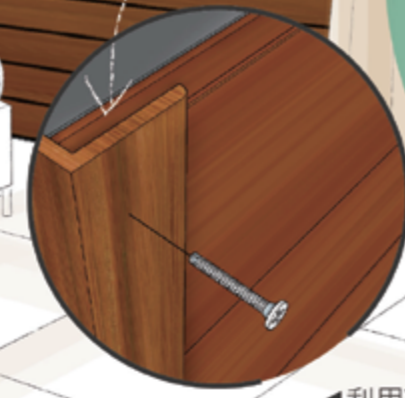

◀ 利用YFI-01收邊 ·

室內天花安裝示圖

- * 固定角材 (一般角材或塑木角材) · 間距為30~50cm(視安裝位置調整) ·
- * 角材與面板之間可以加入三分夾板 · 角材間距可以調整為60cm ·


當安裝於潮濕的環境 (例如: 浴室 / 泳池周圍) 請務必選用塑木角材 · (WE5027 / TW3015)

Indoor Ceiling Installation Schematic Diagram


- * Fixed support material (general support material or plastic wood support material), the distance is 30~50cm (adjust according to the site installation location).
- * Plywood can be added between the support material and the panel and the distance between the support material can be 60cm.

When install in a humid environment (Example: bathroom/around the swimming pool area) please use plastic wood support materials. (WE5027 / TW3015)


- ▲ Plastic wood support material
- ▼ Access opening fitting
- ◀ Lighting / exhaust fan fitting
- ▶ Install access opening / lighting / exhaust fan etc · Just require to strengthen the four sides with supports

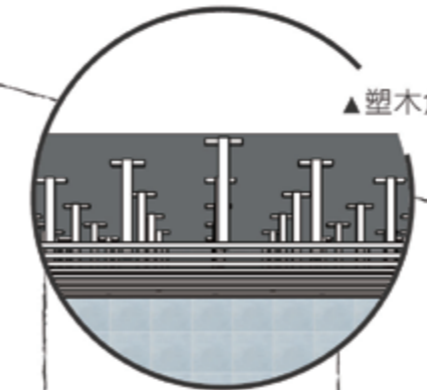


▲ 塑木角材

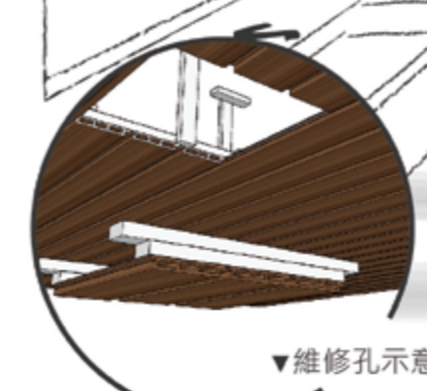

▼ 維修孔示意

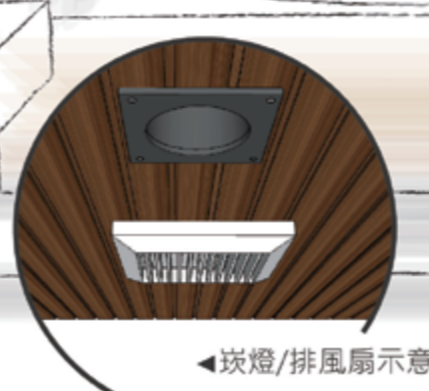

◀ 嵌燈/排風扇示意

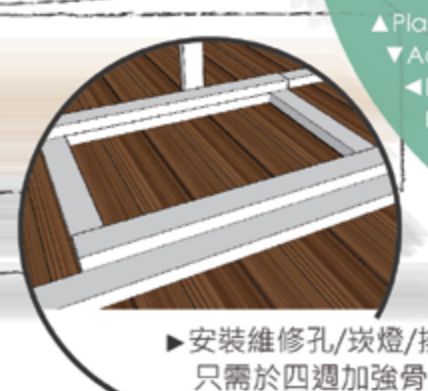

▶ 安裝維修孔/嵌燈/排風扇等只需於四週加強骨架即可

圍籬
百葉拉門
造型天花
室內格柵
戶外大門
戶外圍牆
格柵外牆

內外牆裝飾條板

追求提升外牆美化的視覺感受，享受光影變化間的效果，同時滿足開窗、通風、減低風壓與遮陽節能的效果，獨特的木質美感，延伸建築體每個角度的無限視覺！

中式古韻、日式禪意、北歐簡約、美式鄉村，木格柵都可以完美展現，室外應用木格柵更早已屢見不鮮了，但在材質相較於實木，您有更好的選擇E-Core Wood沂可木，摒除了實木會遇到的問題（開裂、變型、腐爛、白蟻等），但又保有實木的質感與觸感，也是金屬材質無法展現的。



QW12025

尺寸：12cm x 2.5cm
長度：300cm
常備色：桃木色/深柚色
每箱6支



YPI-01

尺寸：4.7cm x 2.5cm
長度：300/360cm
常備色：
桃木色/深柚色/風化灰
每箱20支



QBO-20

尺寸：6.5cm x 2.5cm
長度：300cm
限定色：風化灰
每箱21支



QBO-19

尺寸：10cm x 5cm
長度：300cm
限定色：深柚色
每箱10支



QBO-17A

尺寸：10cm x 3.5cm
長度：300cm
限定色：風化灰
每箱14支

More Sun Shading projects
更多遮陽案例




Grille Exterior Wall
Outdoor Fence
Outdoor Gate
Indoor Grille
Design Ceiling
Louver Sliding Door
Fence

Interior and Exterior Decorative Wall Panel

Seek to enhance the visual experience in beautification of exterior wall, at the same time, enjoy the effect of light and shadow contrast, allow for window opening, ventilation, sufficient level of sun lighting and shade, reducing the wind pressure and provides shade energy saving effect, with unique resemble to the beauty of nature wood and provide an extended unlimited vision of the building at every angle!

Whether in ancient Orient style, Japanese Zen concept, Nordic simplicity or American countryside, wooden grille can be displayed perfectly in any of the style and outdoor applications of wooden grille have long been common usage, but compared to solid wood, you have a better choice using E-Core Wood, which eliminates the problems encountered by solid wood (cracking, deformation, rotting, termites, etc.), and at the same time, retain the aesthetic and texture of nature wood which metal are not able to provide.

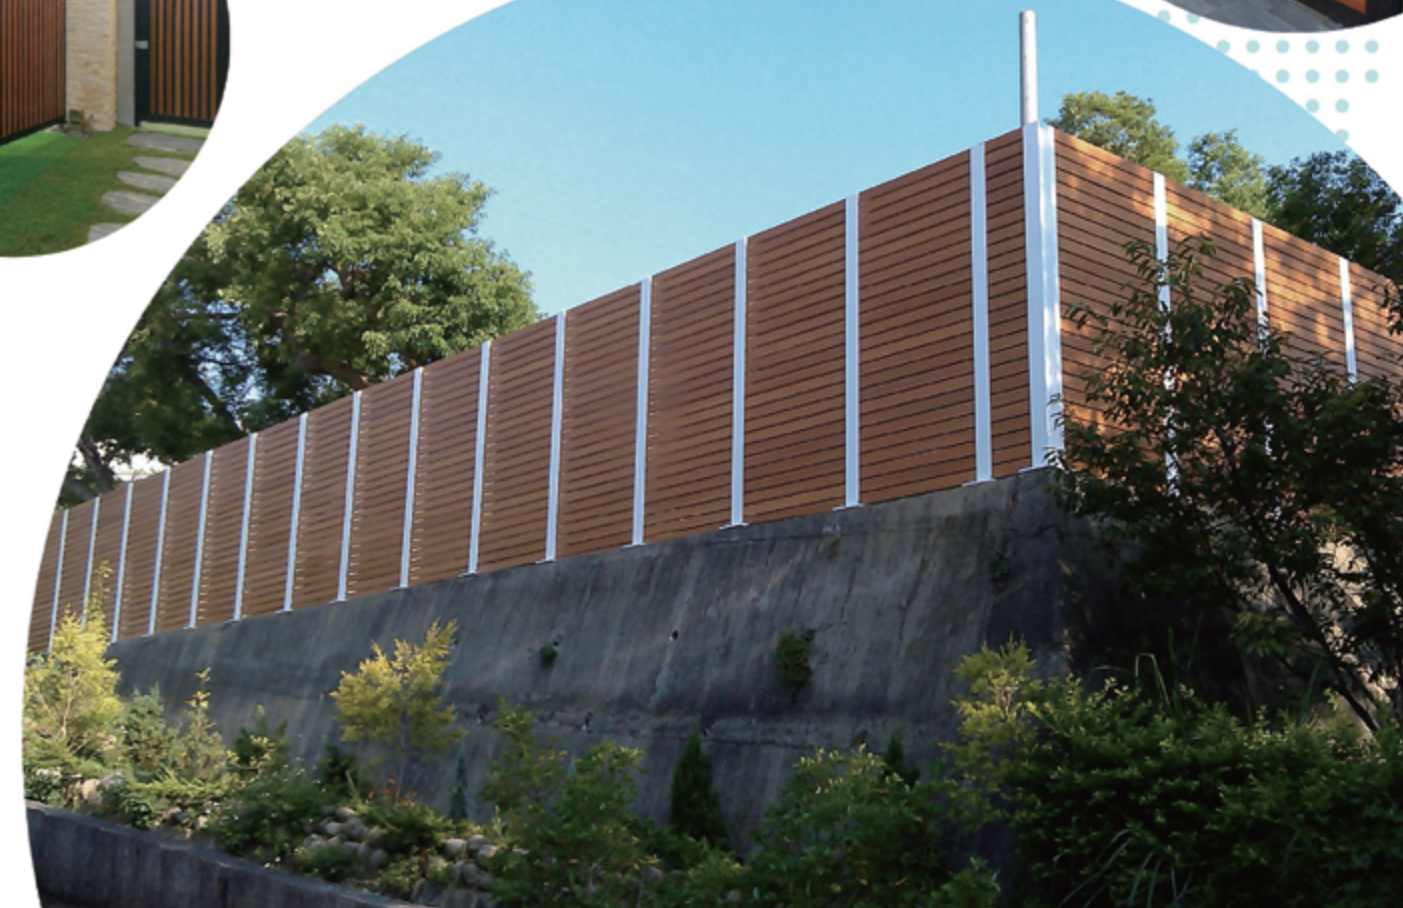



直立式安裝
固定點跨距

型號	尺寸cm	無貫穿角材
QW-12025	12x2.5	≤120
QBO-17A	10x3.5	≤120
QBO-19	10x5	≤150
QBO-20	6.5x2.5	≤150
YPI-01	4.7x2.5	≤120


有貫穿角材時·依角材種類(鐵、鋁、防腐材..)可增加跨距!

橫向立式安裝
固定點跨距

型號	尺寸cm	無貫穿角材 (橫式)	無貫穿角材 (立式)
QW-12025	12 x 2.5	≤120	≤120
QBO-17A	10 x 3.5	≤60	≤100
QBO-19	10 x 5	≤60	≤100
QBO-20	6.5 x 2.5	≤60	≤100
YPI-01	4.7 x 2.5	≤50	≤80



格柵 | 圍籬安裝示圖

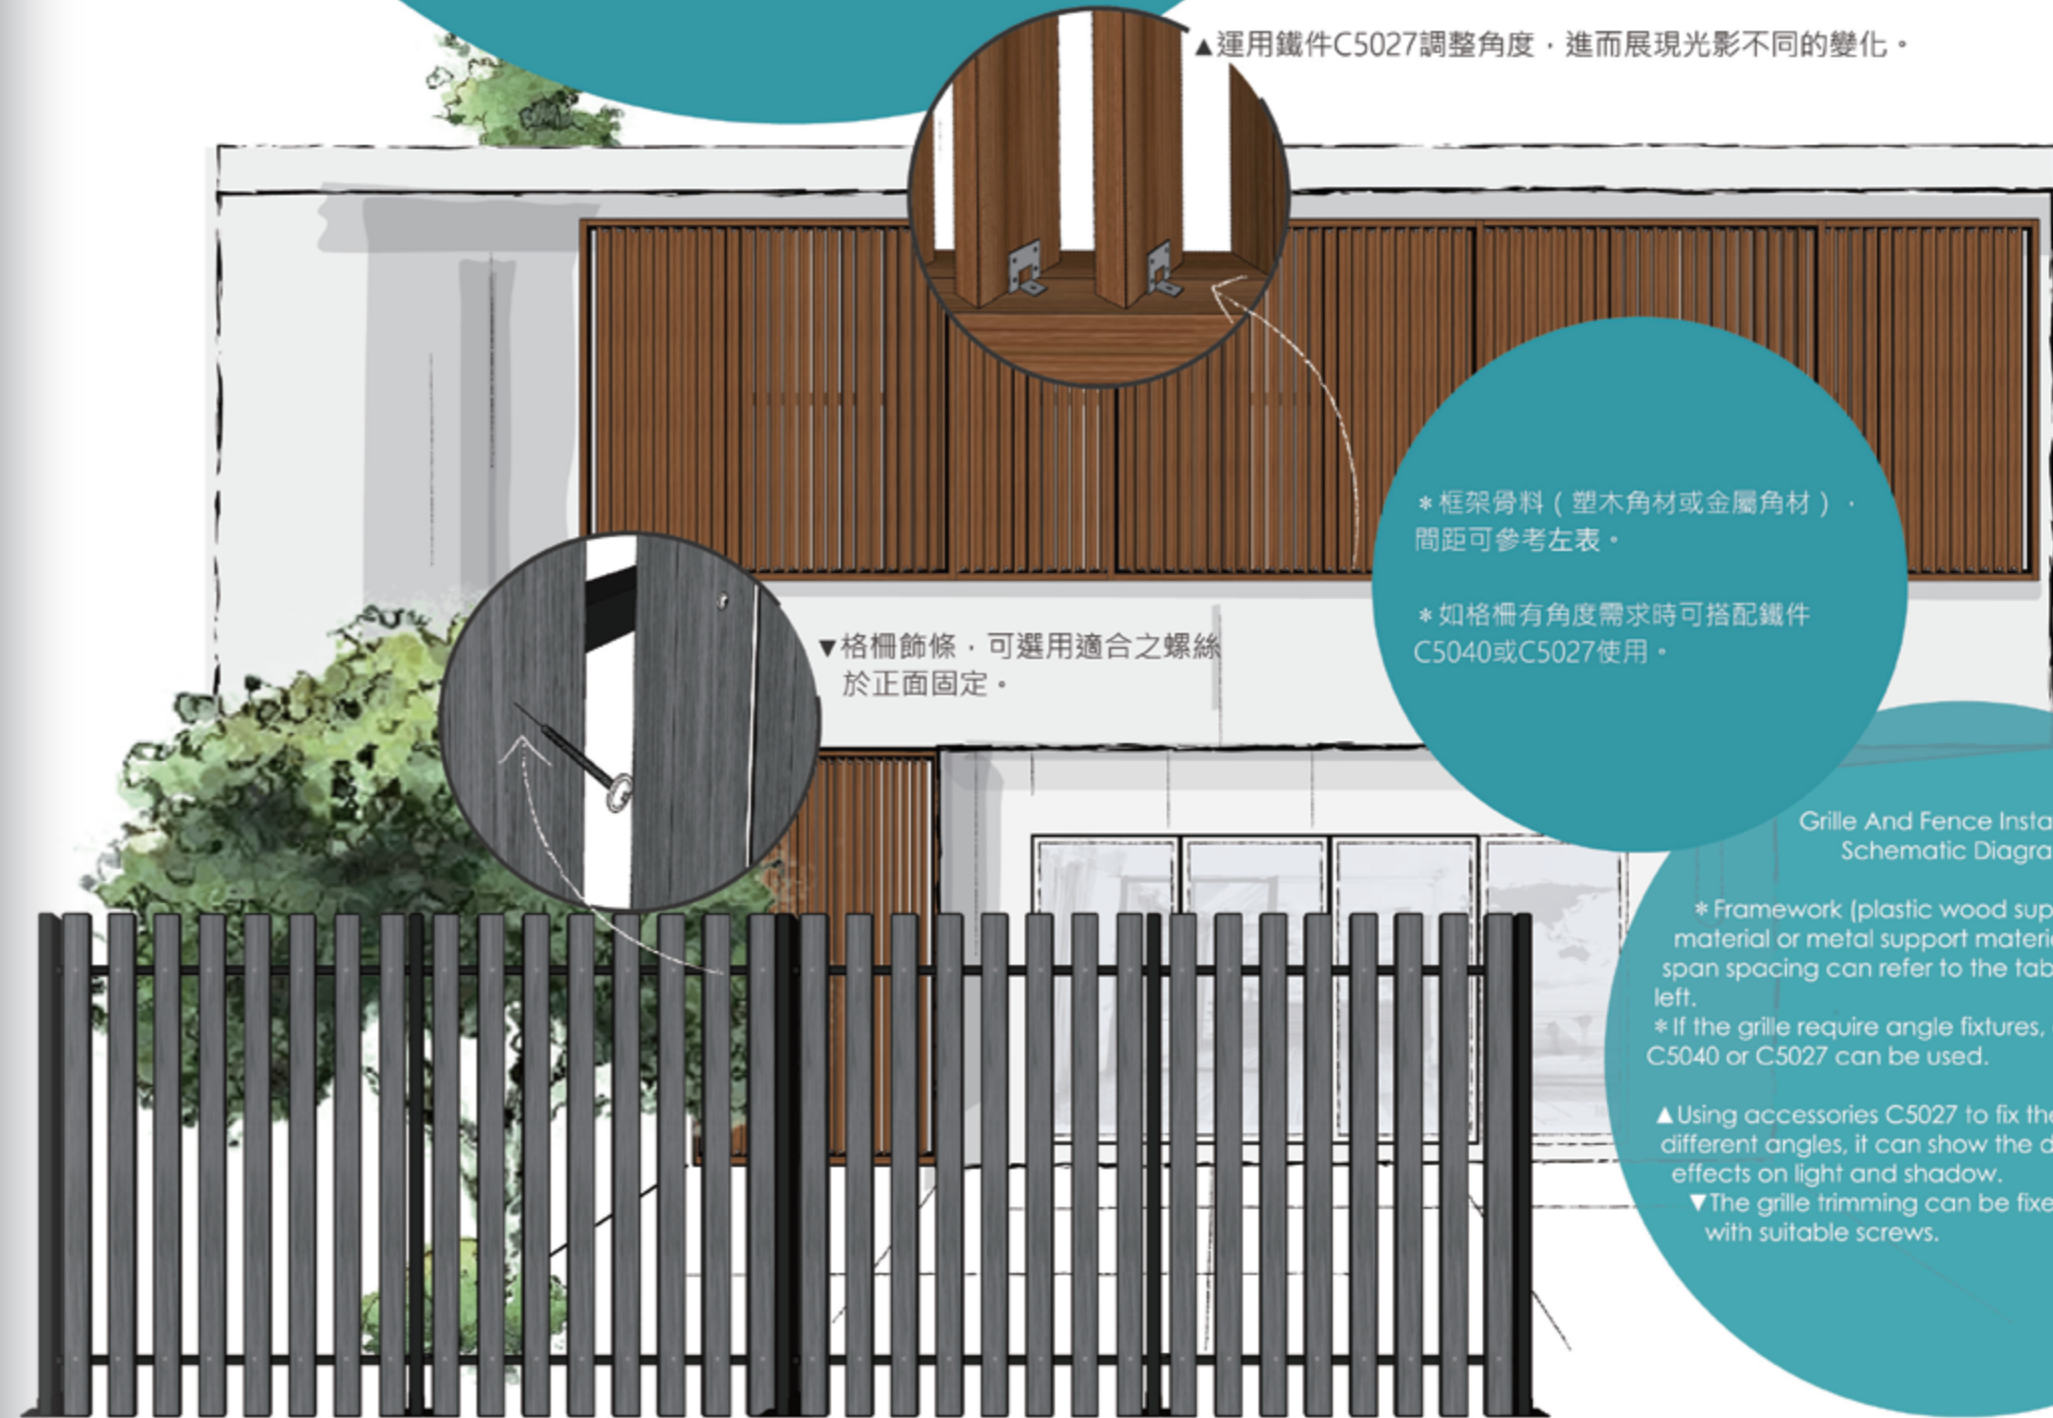

▲運用鐵件C5027調整角度·進而展現光影不同的變化·

▼格柵飾條·可選用適合之螺絲於正面固定·

* 框架骨料 (塑木角材或金屬角材) · 間距可參考左表 ·

* 如格柵有角度需求時可搭配鐵件 C5040或C5027使用 ·

Grille And Fence Installation Schematic Diagram

* Framework (plastic wood support material or metal support material) - the span spacing can refer to the table on the left.
* If the grille require angle fixtures, accessories C5040 or C5027 can be used.

▲ Using accessories C5027 to fix the grilles at different angles, it can show the different effects on light and shadow.
▼ The grille trimming can be fixed direct with suitable screws.

卡扣系列

沂可木 格柵天花-卡扣系列 提昇空間美化的視覺新享受，層次分明、立體感強、外觀簡潔，舒緩封閉式的壓迫感，安裝可以搭配市面通用之支撐架，安裝便利！

沂可木 格柵天花-卡扣系列 具實木質感與美感，細緻紋理內斂卻不失時尚更多了一份人文意象。

大型商場
休閒會所
公共空間
停車場上空
玄關大廳

CL07
桃木色

CL20
雪松白

CL25
深柚色

T4020

尺寸：4cm x 2cm
長度：360cm
常備色：桃木色 / 深柚色
每箱36支

T4045

尺寸：4cm x 4.5cm
長度：360cm
常備色：桃木色 / 深柚色
每箱18支

熱銷款

T5090

尺寸：5cm x 9cm
長度：360cm
常備色：桃木色 / 雪松白 / 深柚色
每箱8支

卡扣系列使用參考數量

	面板使用支數	每m ²	金屬骨架支數
T5090	見5cm+0.15cm	5.4支	上層間距150cm + 下層間距60cm~90cm
	見5cm+5.3cm	2.7支	
	見5cm+10.5cm	1.8支	
T4020 & T4045	見4cm+1cm	5.6支	0.75~1.05支
	見4cm+6cm	2.8支	

本“數量”僅供參考，因工法及現地因素不同而產生差異。




Shopping Mall
Recreation Club
Public Space
Over parking lot
Entrance hall

Snap On series

E-Core Wood Snap On series enhance the visual enjoyment in space beautification, providing layering effects, strong three-dimensional effect, elegant simple appearance, soothing the feeling of enclosure effect, installation can be matched with the universal support frame available in the market making the installation is easy and convenient!

E-Core Wood Snap On series resemble the beauty of nature wood, the meticulous texture is natural and yet fashionable.

卡扣天花安裝示圖

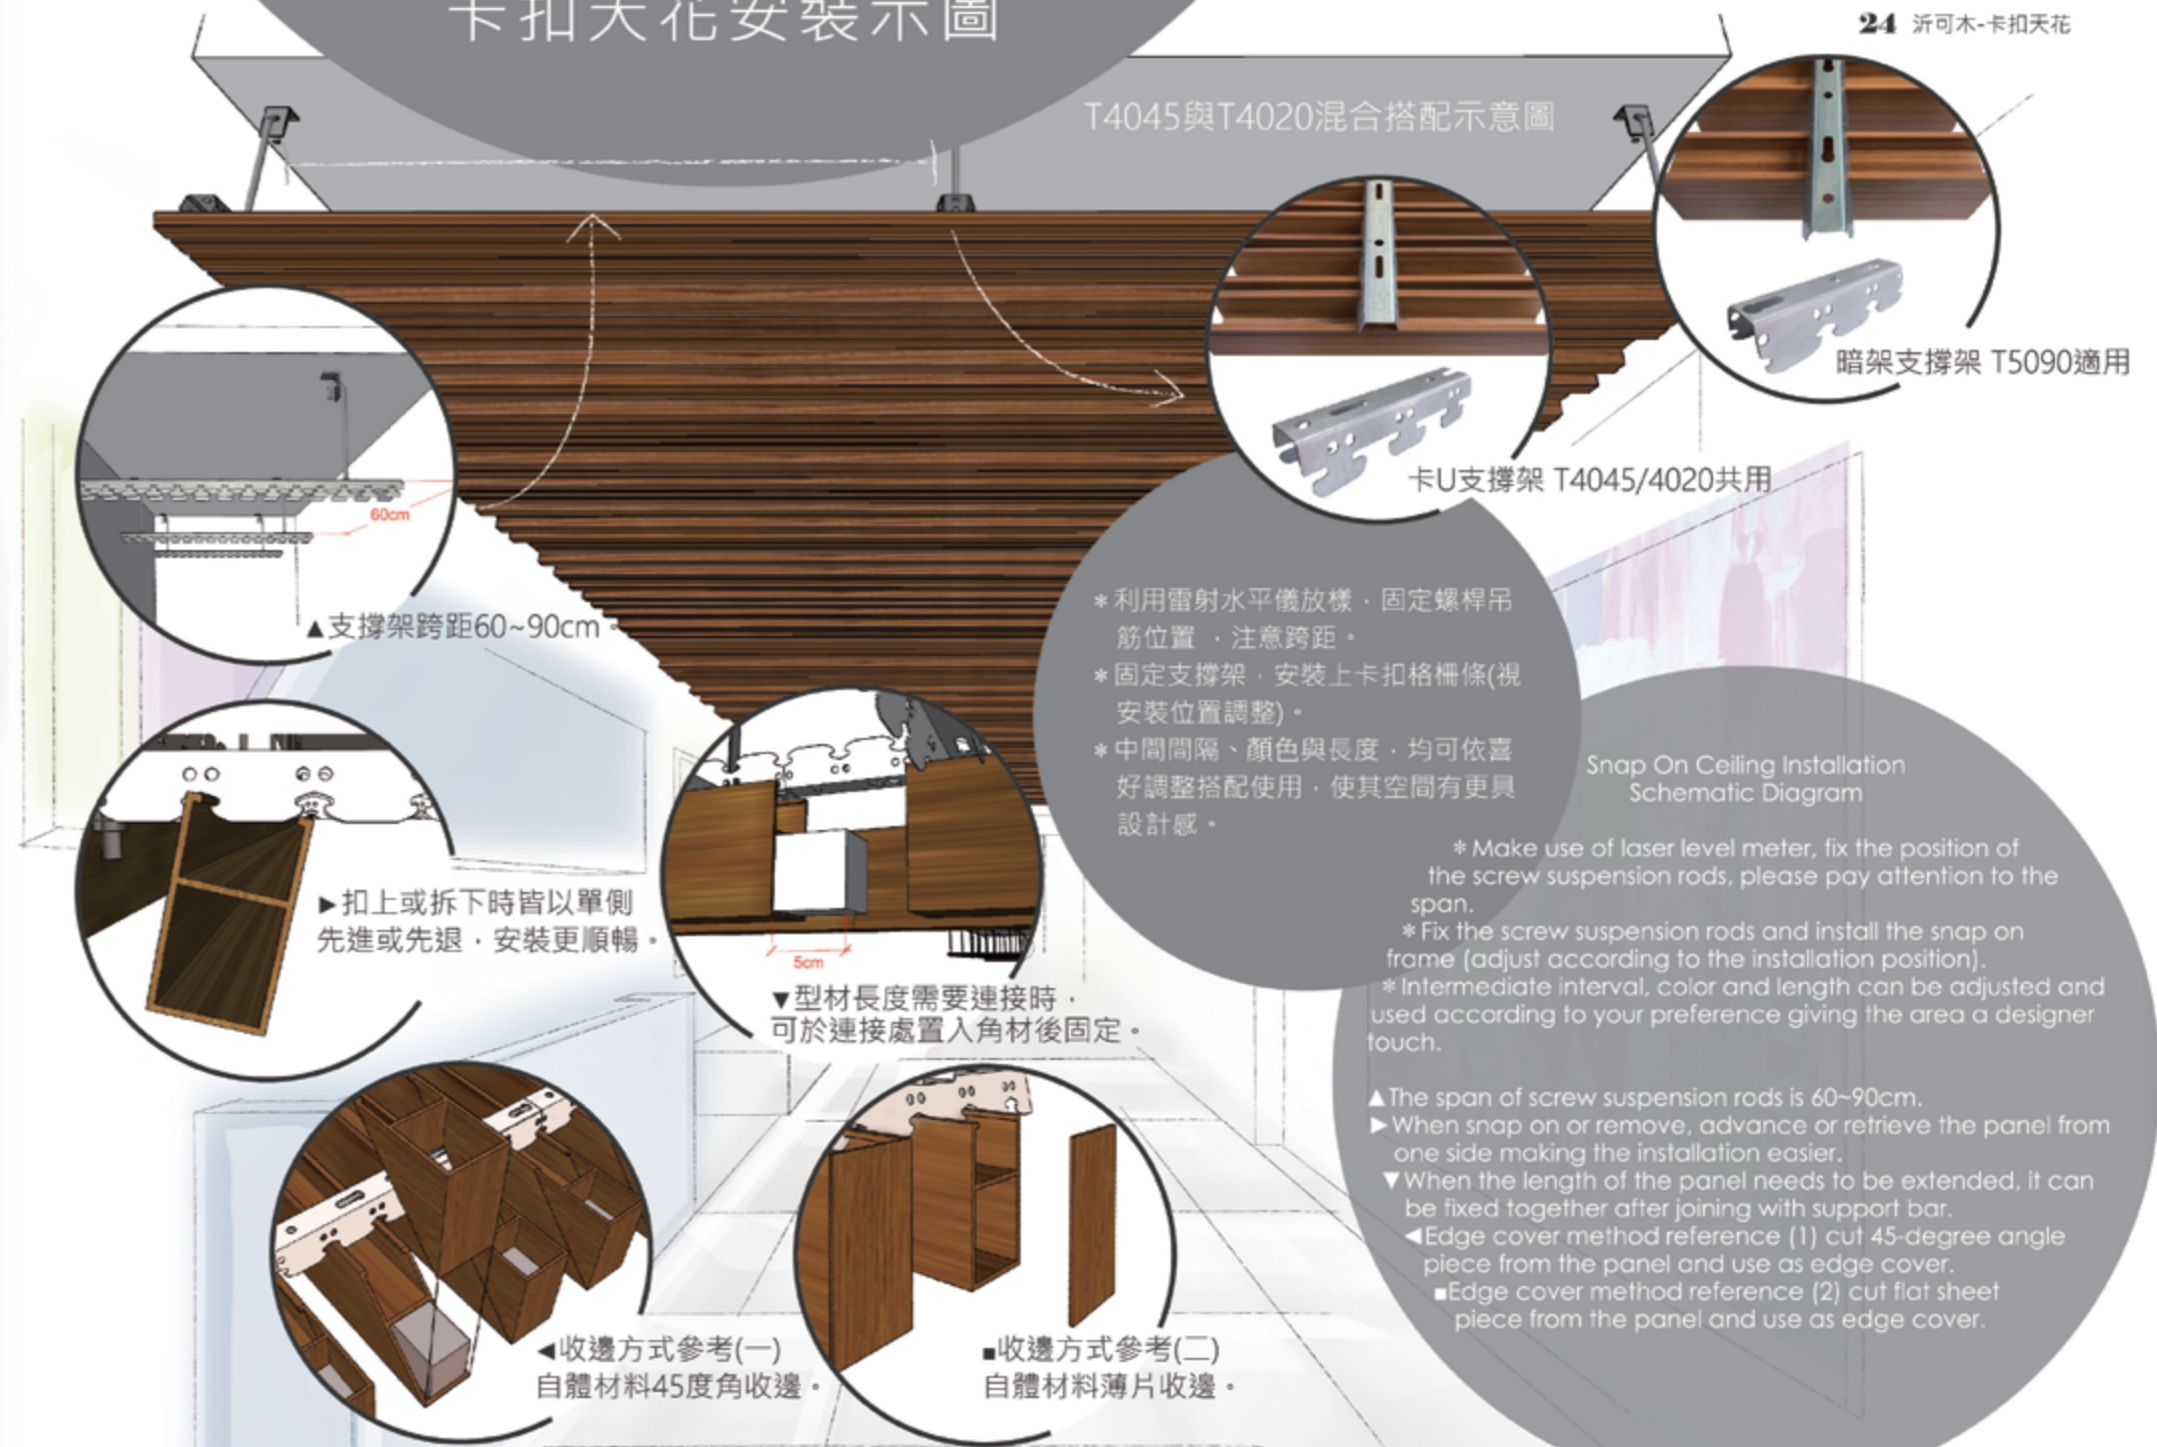

Question & Answer

Q01

常常聽到這個名詞但是究竟甚麼是塑木？

01A：簡稱 WPC (Wood Plastic Composites) 的塑木，將木分子與塑膠分子結合之後再製成的複合材料，就如大家所聽聞的表面得跟木材很相似卻又可以**屏除天然木材的缺陷(翹曲、變形、腐爛、白蟻侵蝕...)**，大大提升戶外耐用度，這是最淺顯易懂的說明了...，然而市面上的塑木品牌眾多，因為主要成分差異、製程原理不同，因此也產生截然不同的產品特性。

Q02

哪些地方適用塑木呢？

02A：大致上可以區分為兩個方向來判斷，第一就是早期使用“實木”的位置，例如：裝飾牆板、地板(平台)、格柵、小木屋、花架、廊道、欄杆、傢俱...等位置，可以考慮使用塑木來取代。第二就是考慮**環境條件**，我們舉例“戶外地板”：很多人認識塑木都是從地板開始，塑木的基本就是一種熱塑性的產品所以它的缺點就是“怕太熱”，環境溫度會直接影響產品的穩定度，建議讓有經驗的專業廠商幫您評估現地條件，才能確保塑木地板能在戶外長期被使用。市售的某些塑木在安裝後不久就會產生變形、翹曲、開裂的形況，除了某些本身塑分子的特性無法避免之外就是熱源導致產品變異，所以無論是哪一個塑木品牌在極端氣候下都不適合使用。

Q04

塑木-相關產品中常伴有塑化劑的疑慮，你們沒有嗎？

04A：塑化劑 (plasticizers) 又稱增塑劑、可塑劑，是一種可以增加材料柔軟性或是讓材料液化的添加物。塑化劑是對人類身體有著很大傷害的物質(天天出現在報章雜誌上的資訊，大家都知道)，怎麼可以出現在天天接觸的到位置呢？絕對不可以，我們從原物料的選擇就始終堅持**不添加任何與“塑化劑”相關的原料，不只八項塑化劑，連同甲醛、鉛含量都是“未檢出”**，雖然會造成成本的增加(採用天然無害等級的添加物成本昂貴)，但是健康絕對不容忽視。

請您可以安心選用。

Q05

市售的塑木越來越多稱為共擠、包覆層的材料，為什麼你們沒有？

05A：目前沒有的原因是，因為本身**材料特性穩定**，所以不需要在表面加上共擠層。所謂共擠成型是指將兩種不同材質的材料在擠出成型的過程中同時出料，將耐候性較佳的材質包覆在表面，藉此保護特性不穩定的內部材料，但可能造成內外層材料特性的差異、收縮比的差異...會有長期在戶外曝曬之下會**產生分離、脫層**的疑慮；除非我們能完全的克服這樣不良的產品特性，否則目前尚未考慮推出這樣的商品。

Q07

建築物裝修的選材上我會擔心防火的問題耶？我聽說塑木是屬於易燃的材料？

07A：沒錯，這些年政府在裝修材料的防火規範要求上越來越嚴格尤其是公共區域(公共場所)，我們也非常肯定政府的用心，畢竟這攸關人民生命產財，絕對不容馬虎，**我們的材料屬於防焰等級**(根據CNS7614所測得)(所謂防焰物品可以簡單的定義為：具有防止因微小火源，而起火或迅速延燒性能之物品)，但是，並非所有的塑木都可以達到這樣的要求，市面上所銷售的塑木種類眾多，有些種類一旦接觸火源將會一發不可收拾的延燒！在您的參考比較各類商品之後千萬不要忽略了“防焰”的重要性。(近日聽到同業人員，誤導視聽~也許是本身知識錯誤、也許是部分不肖廠商故意於市面上誤導消費者，直言本公司的產品屬於易燃物質，我們譴責這樣的行為，也必須導正視聽。)右圖為各成份塑木，噴槍以明火燃燒30秒後，明火離開，觀察其狀況。

結果：沂可木產品-噴槍離開明火即熄滅，約20秒後煙霧停止，它牌塑木持續燃燒並發出濃煙。

Q06

別人說安裝塑木地板的時候要銜接處預留收縮縫，為什麼你們卻說不可以留縫？

06A：產品特性的差異，多數的廠商都會要求安裝面板的時要預留5~10mm (甚至更大)是因為他們的產品會受到環境溫度而“長大”，面板一旦長大了，沒有預留收縮縫或預留縫不足後果不堪設想，在面板互相擠壓的情況之下就會產生面板變形、翹曲的嚴重後果，**我們的商品穩定性極佳，不會因為環境溫度就膨脹，所以安裝的時候絕對不需要預留收縮縫**；經過環境氣候的調節會收縮產生自然的縫隙，完全不影響產品的穩定度。

Q08

這樣的產品適合安裝在潮濕的環境甚至是溫泉區或鹽分很高的海邊附近嗎？

08A：因為在製造的過程中，木分子已經被塑分子所包覆，並不會產生明顯的吸水效應所以安裝在潮濕的環境中絕對沒有問題，另外我們的產品都經過酸、鹼及鹽分的測試，耐用度上不用擔心。

03A：我們的材料利用塑木材質研發出兩個不同的安裝系統，簡單來說“**corewood 沂可木**”的產品適用於一般家裝系統(例如內牆裝飾、天花板裝飾、卡扣格柵、陽台地板...等)。

另外，在產品組成中保持原有的木質美感更加入與“鋁”型材結合的安裝方式，克服了傳統塑木結構性不足的問題，因此產生“**AluCo Wood 鋁新木**”(例如：小木屋、涼亭、花架、廊道、欄杆、戶外家具...等)。

Q03

沂可木和鋁新木有甚麼不同？



Q09

你們的塑木會退色嗎？

09A：會的，所有的物品都不可能阻止因為日曬(紫外線)所導致的顏色漸退...，所以我們的戶外產品在產品出廠之前已經採用水性、無毒的抗UV塗料進行塗刷完成，大大的提升了產品在戶外使用的色牢度。既然任何物品在紫外線的照射之下退色都無法避免，那退色之後要如何解決、恢復？

我們經常接獲電話，客戶想讓自家已經退色的塑木地板像早期的南方松地板一樣上漆保養恢復色澤，也通常我們會詢問客戶，您家的塑木是甚麼品牌？市面上宣稱自己不會退色的地板在退色之後是無法上漆恢復的(註)，因為這些產品無法讓塗料吸收、附著，我們也無能為力。我們的產品可以在多年之後、顏色漸退之後、當您出現了想要修改顏色的念頭之後...都可以與我們聯繫！煥然一新就這麼簡單。(註：市售PP、PE(HDPE)種類的塑木屬於結晶性及非極性產品導致材料無法附著耐候塗料，所以退色之後便無法利用耐候塗料將其還原；PVC種類的塑木屬於非結晶性的產品，在戶外長期使用之後，即使退色了，也可以利用環保水性耐候漆還原表面色澤。)


沂可木地板安裝後8年案例，使用-環保水性耐候漆 恢復顏色。

After
Before

Q10

為什麼要選用塑木角材呢？我聽說市售的塑膠角材都很爛、不勘使用...？

10A：“塑膠角材”跟“塑木角材”確實有些差異，顧名思義最大的差別“**塑膠角材**”並不含有木纖維成分，很多師傅都說：**抓釘力不佳**，鎖上螺絲之後徒手搖一搖就鬆脫了，我們的塑木角材除了含有一定比例的木分子，抓釘力測試沒有問題，更沒有如某些廠商所言會有彎曲下垂的問題，我們經常性的搭配地板安裝，無論是架高10公分還是架高100公分都沒有問題。塑木角材禁得起戶外環境的考驗與塑木面板同屬性，搭配安裝更是便利。

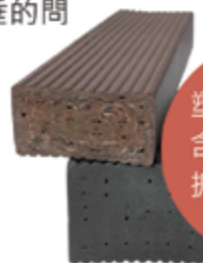

塑木角材內含有木纖維抓釘力佳!

Q11

有些人建議我選用不鏽鋼或鋁角材，究竟搭配塑木地板應該怎麼選擇角材種類？

11A：消費者會選用塑木面板最大的原動力就是，根據以往的經驗不想一再更換地板，浪費錢又費時費工，所以期許塑木面板可以一勞永逸使用好多年...，**強烈建議您，選用塑木角材搭配安裝塑木面板吧!**

種類？	塑木角材	不鏽鋼方管或C型鋼	鋁質角材
施工工種	與面板安裝同屬木工工種	鐵工(特殊機具)	鐵工或木工
靈活調整度	高(隨意裁切靈活應用)	低	中
固定方式	不鏽鋼木螺絲	電銲	L型角片固定
角材完成的細緻度	高	低(根據鐵工師傅的施工品質而定)	中
耐用度	高(不會生鏽、腐爛、變形)	中(即使是不鏽鋼產品也區分不同等級，耐用度有著極大差異)	中

Q12

我家陽台想要做塑木地板，適合嗎？如何做？

12A：“塑木地板”常常被消費者優先認識並選擇安裝在自家陽台或庭園(平台)中，取代了早期人們所選用的“南方松”，考量產品的耐用度我建議您優先選用禁得起市場考驗的塑木品牌，**Corewood 沂可木**地板在家裝市場上有一定的品牌口碑，備好您的現地尺寸與現場照片直接跟我們聯繫吧!


15A：完全不需要，安裝完畢等同可以收工囉...；安裝在室內時完全不需要保養維護，如果是安裝在戶外可以依實際需求上漆保養(因個案而異)。安裝在天花板時當然可以加入炭燈，根據木工的工法來完成就可以了。



Q13

我家院子的南方松地板已經腐爛了，想要換成塑木地板，怎麼做？

13A：依照經驗的推測，您們家的南方松地板當初如果也是採用防腐角材應該也不勘使用了，我建議您將連同角材及面板一併拆除重新施作，選用塑木角材一勞永逸！如果當初您是選擇不鏽鋼方管等金屬角材，我們可以根據現地的堪用狀況幫您重新補強並完成塑木面板的鋪設喔！

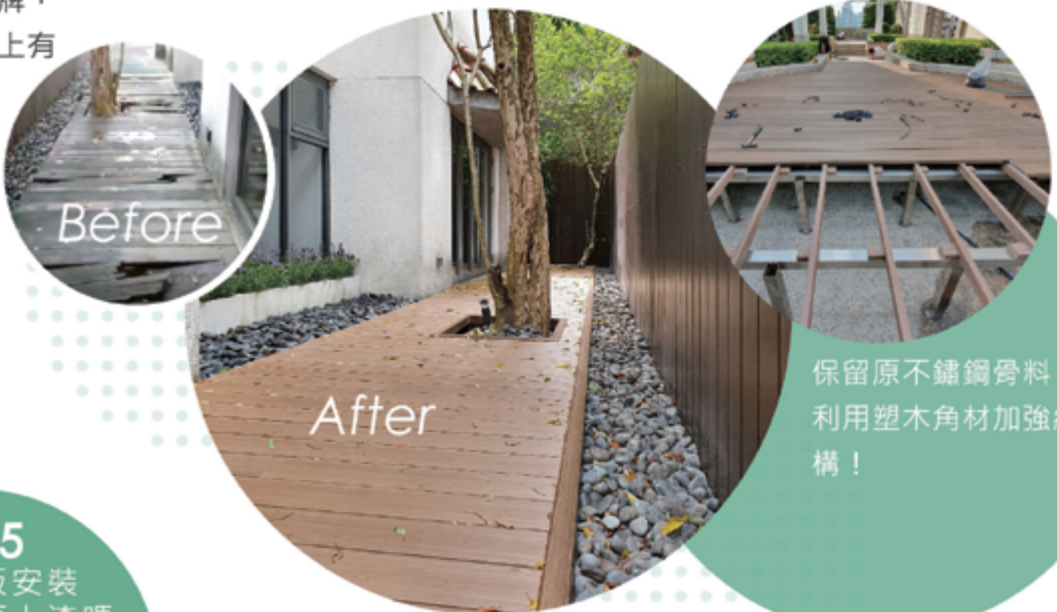

保留原不鏽鋼骨料，利用塑木角材加強結構！

Q16

卡扣格柵系列我可以自己買來安裝嗎？

16A：卡扣天花系列的標準安裝屬於輕鋼架系統，安裝的過程中包含了輕鋼架的骨料固定，所以我建議您找當地的輕鋼架系統商幫您安裝比較快速，通常這樣的系統商也具有完成面板安裝的能力，快速又便利的安裝工法，輕鬆安裝不用擔心。

Q14

完工之後我要如何保養我的塑木地板呢？

14A：塑木地板不需要特別保養，只要在您平常時整理花園或浴室的時候沖沖水把垃圾帶走就可以了，不過要提醒您，不要使用含強酸或鹼的去汙劑or清潔劑來清洗表面喔。

Q17

塑木格柵與金屬格柵的主要差異？

17A：一般常見的格柵為鋁或金屬材質，雖然金屬格柵可以阻隔紫外線(產生陰影)但是無法隔絕紅外線所產生的熱源，金屬的材質甚至會蓄熱，造成更大的輻射熱源。本材料設計都屬於中空腔體結構，外層塑木材質極低的熱傳導係數，有效阻隔了金屬格柵的快速導熱特性。

有任何關於本產品的問題，歡迎來電詢問！04-2567-7397

杉澤國際有限公司

42841台中市大雅區中山八路97巷2號

Http : //www.woodeasy.com.tw

TEL:+886-4-2567-7397

FAX:+886-4-2560-0174



環保愛地球—沂可木系列 唯一落實 回收再製。